


Storz

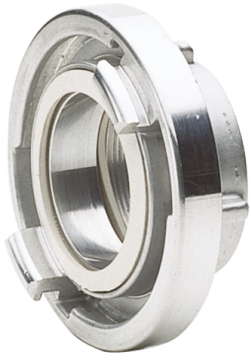

Festkupplungen mit Innengewinde

Norm Gewinde	DIN EN ISO 228-1
Gewindetyp	BSPP-Gewinde / G-Gewinde
Material	Aluminium
Betriebsdruck	16 bar
Ausführung	Geschmiedetes Knaggenteil
Werkstoff Dichtung	NBR
Farbe Dichtung	Weiss

Art. Nr.	IG	Storz - Größe	Knaggenabstand (mm)	Gewicht (kg/St.)
5111019031	3/4"	D	31	0,080
5111025031	1"	D	31	0,078
5111025066	1"	C	66	0,287
5111032052	1.1/4"	-	52	0,165
5111032066	1.1/4"	C	66	0,303
5111038052	1.1/2"	-	52	0,152
5111038066	1.1/2"	C	66	0,268
5111050066	2"	C	66	0,271
5111050081	2"	-	81	0,384
5111050089	2"	B	89	0,428
5111063066	2.1/2"	C	66	0,281
5111063081	2.1/2"	-	81	0,374
5111063089	2.1/2"	B	89	0,428
5111075081	3"	-	81	0,408
5111075089	3"	B	89	0,418
5111100114	4"	-	115	0,804
5111100133	4"	A	133	1,078

